


BM.5.\*\*...

<b>BM</b>	Multi station subplate (standard versions are supplied in cast iron material)
<b>5</b>	CETOP 5/NG10
<b>**</b>	<b>50</b> = Connected in parallel with pressure relief valve and rear connectors <b>60</b> = Connected in parallel without pressure relief valve and side connectors <b>70</b> = Connected in parallel with pressure relief valve and 3/4" BSP P/T connectors and 1/2" BSP side A/B <b>80</b> = Connected in parallel with pressure relief valve and 1" BSP P/T connectors and 3/4" BSP side A/B
<b>*</b>	No. of valves seats (for BM.5.80... max 6)) <b>2 / 3 / 4 / 5 / 6 / 7 / 8</b>
<b>*</b>	Type of adjustment (omit for 60 version) <b>M</b> = Plastic knob <b>C</b> = Grub screw
<b>*</b>	Setting range (omit for 60 version) <b>1</b> = max. 50 bar ( <b>white spring</b> ) <b>2</b> = max. 140 bar ( <b>yellow spring</b> ) <b>3</b> = max. 350 bar ( <b>green spring</b> )
<b>**</b>	<b>00</b> = No variant <b>AL</b> = in aluminium material (only for BM560 and BM570 versions)
<b>1</b>	Serial No.





**• The minimum permissible setting pressure is the same for all spring: see cartridge valve type CMP.30...**

BM.5.50 CONNECTED IN PARALLEL WITH PRESSURE RELIEF VALVE

7

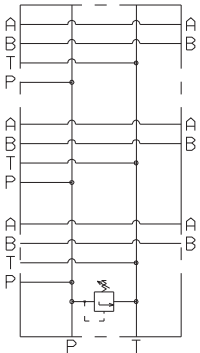



Type	A	B	Weight(Kg)
BM.5.50/2	216	200	8,5
BM.5.50/3	291	275	11,3
BM.5.50/4	366	350	14
BM.5.50/5	441	425	16,8
BM.5.50/6	516	500	19,5
BM.5.50/7	591	575	22,3
BM.5.50/8	666	650	25

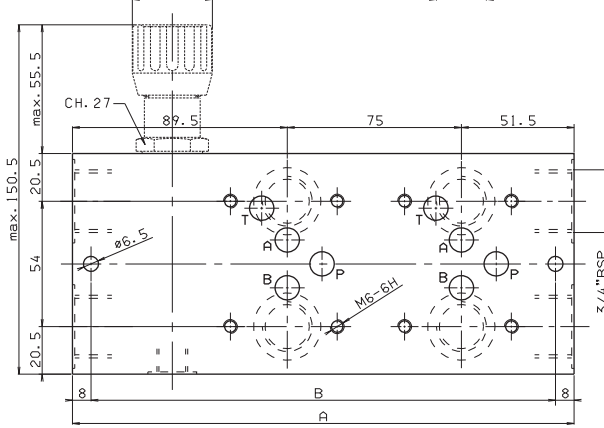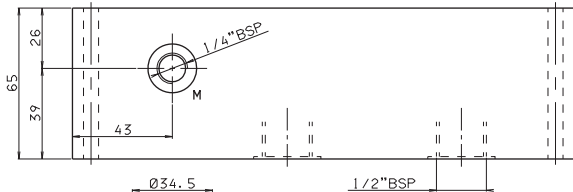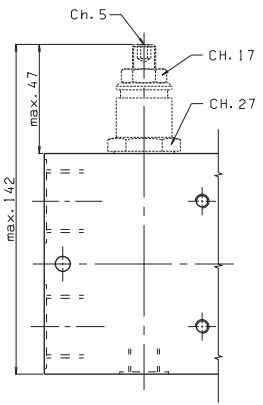


Fixing screws M6x75 UNI 5931

**BM.5.60 CONNECTED IN PARALLEL WITHOUT PRESSURE RELIEF VALVE**

Type	A	B	Weight(Kg)
BM.5.60/2	175	159	10
BM.5.60/3	250	234	14,2
BM.5.60/4	325	309	18,4
BM.5.60/5	400	384	22,6
BM.5.60/6	475	459	26,8
BM.5.60/7	550	534	31
BM.5.60/8	625	609	35,2



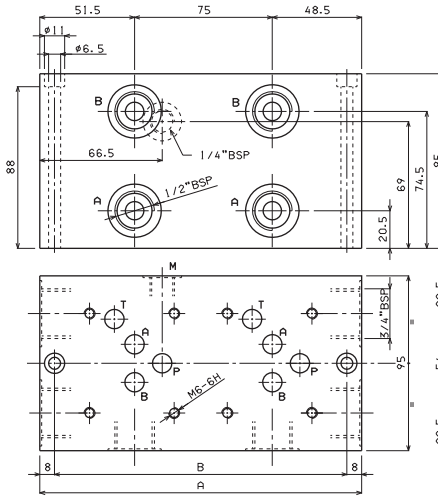



Fixing screws M6x100 UNI 5931




**BM.5.70 CONNECTED IN PARALLEL WITH PRESSURE RELIEF VALVE**

Type	A	B	Weight(Kg)
BM.5.70/2	216	200	12,7
BM.5.70/3	291	275	16,8
BM.5.70/4	366	350	21
BM.5.70/5	441	425	25,2
BM.5.70/6	516	500	29,5
BM.5.70/7	591	575	33,6
BM.5.70/8	666	650	37,8







Fixing screws M6x100 UNI 5931

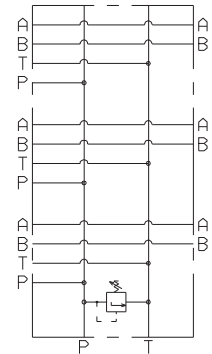

**BM.5.80 CONNECTED IN PARALLEL WITH PRESSURE RELIEF VALVE**

Type	A	B	Weight(Kg)
BM.5.80/2	225	205	19,5
BM.5.80/3	300	280	26
BM.5.80/4	375	355	32,5
BM.5.80/5	450	430	39
BM.5.80/6	525	505	45,5



Fixing screws M8x110 UNI 5931

