


XD.3.A... / XD.3.C... SOLENOID OPERATING PROPORTIONAL VALVES CETOP 3

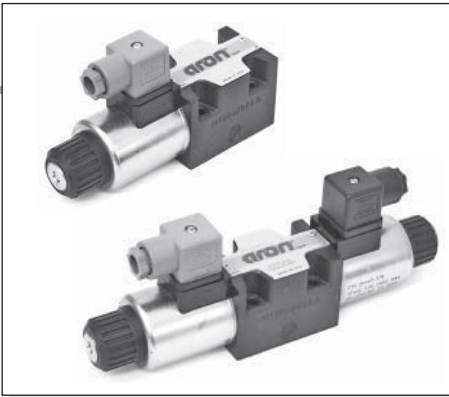

XD.3.A../XD.3.C.. series valves are used for controlling fluid direction and flow rate as a function of the supply current to the proportional control solenoid.


Any valve Δp variation causes a change in the set flow rate; however the valve itself ensure a high level internal compensation by limiting the controlled flow rate.

To ensure a constant flow rate and reduce leakage, we recommend to use AM3H2V or AM3H3V hydrostats.

Performances shown in this catalogue are guaranteed only using 2 or 3 way modular assembly hydrostats type AM.3.H. ...

The shown flow rates are typical for one line operation (e.g. from P to B), while higher flow rates are obtainable by using the valve with our flow rate doubling sub-base type BC.3.07 (see diagram next page). This type of configuration extends considerably the flow rate limit.

XD.3...	
STANDARD CONNECTORS	CH. I PAGE 19
"D15P" PROPORT. SOLENOIDS	CH. VIII PAGE 3
REM.S.RA...	CH. IX PAGE 4
REM.D.RA...	CH. IX PAGE 7
SE.3.AN21.00...	CH. IX PAGE 11
AM.3.H...	CH. VIII PAGE 16
BC.3.07...	CH. VII PAGE 12

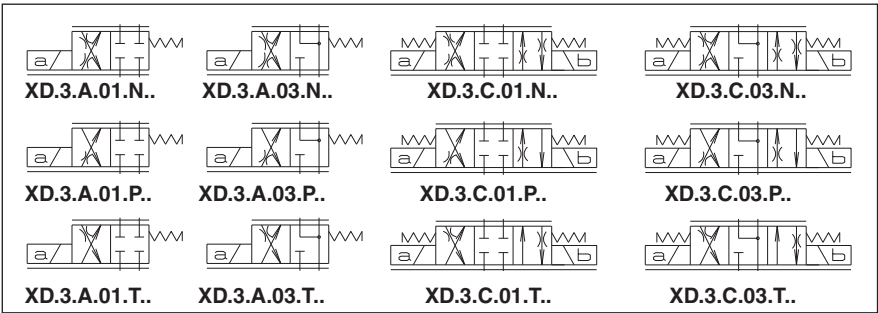


ORDERING CODE

XD	Proportional valve
3	CETOP 3/NG6
*	A = Single solenoid C = Double solenoid
**	Type of spool (null position) <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> 01 = </div> <div style="text-align: center;"> 03 = </div> </div>
*	Flow path control (see symbols table) N = symmetrical P = meter in T = meter out
*	Flow rating l/min (Δp 5 bar) 1 = 3 l/min 2 = 10 l/min 3 = 15 l/min 4 = 18 l/min
*	E = 9VDC (2.35 A) F = 12VDC (1.76 A) G = 24VDC (0.88 A)
**	Variant (*): S1 = No variant (without connectors) VS = Viton P2 = Rotary emergency R5 = Rotary emergency 180°
2	Serial No.

(* All variants are considered without connectors. The connectors must be order separately. See Ch. I Page 19

INPUT SIGNAL CURVES - FLOW RATE

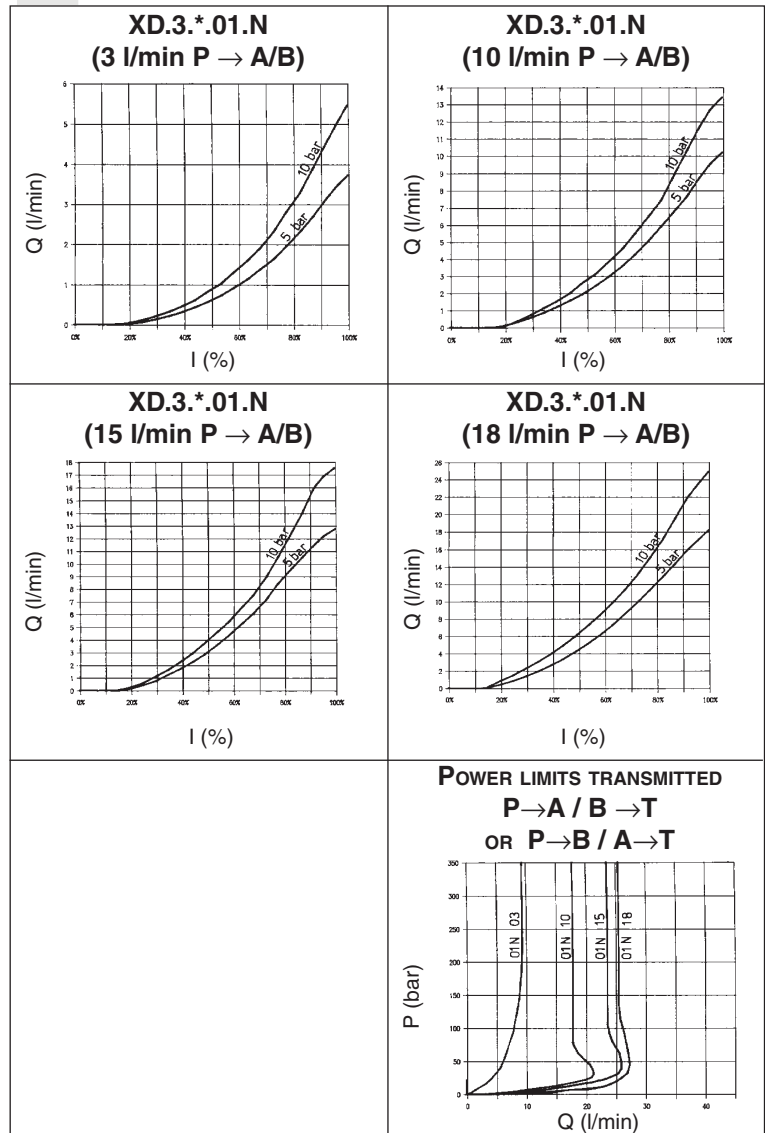

The fluid used is a mineral based oil with a viscosity of 46 mm²/s at 40°C. The tests have been carried out at with a fluid of a 40°C.

OPERATING SPECIFICATIONS

Max. operating pressure ports P/A/B	350 bar		
Max. operating pressure ports T - for dynamic pressure see note (*)	250 bar		
Regulated flow rate	3 / 10 / 15 / 20 / 25 l/min		
Relative duty cycle	Continuous 100% ED		
Type of protection	IP 65		
Flow rate gain	See diagrams		
Hysteresis with connection P/A/B/T $\Delta p = 5$ bar (P/A)	$\leq 7\%$ of max. flow rate		
Fluid viscosity	$10 \div 500$ mm ² /s		
Fluid temperature	$-20^{\circ}\text{C} \div 75^{\circ}\text{C}$		
Max. contamination level	class 8 in accordance with NAS 1638 with filter $\beta_{10} \geq 75$		
Weight XD.3.A... (single solenoid)	1,5 Kg		
Weight XD.3.C... (double solenoid)	1,7 Kg		
Type of voltage	9V	12V	24V
Max. current	2.35A	1.76 A	0.88 A
Solenoid coil resistance at 25°C (77°F)	2.25 Ohm	4.0 Ohm	16.0 Ohm

(*) Pressure dynamic allowed for 2 millions of cycles.

• Operating specifications are valid for fluid with 46 mm²/s viscosity at 40°C, using the specified ARON electronic control units.


ELECTRONIC CONTROL UNIT

REM.S.RA. and REM.D.RA.****
Card type control for single and double solenoid

SE.3.AN.21.00...
EUROCARD type control for single and double solenoid



AM.3.H.2V.P1 and AM.3.H.3V.P1
Hydrostats 2 or 3 way.

SCHEMA FOR DOUBLE FLOW RATE

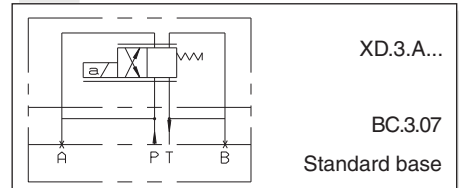

XD.3.A... OVERALL DIMENSIONS


XD.3.C... OVERALL DIMENSIONS

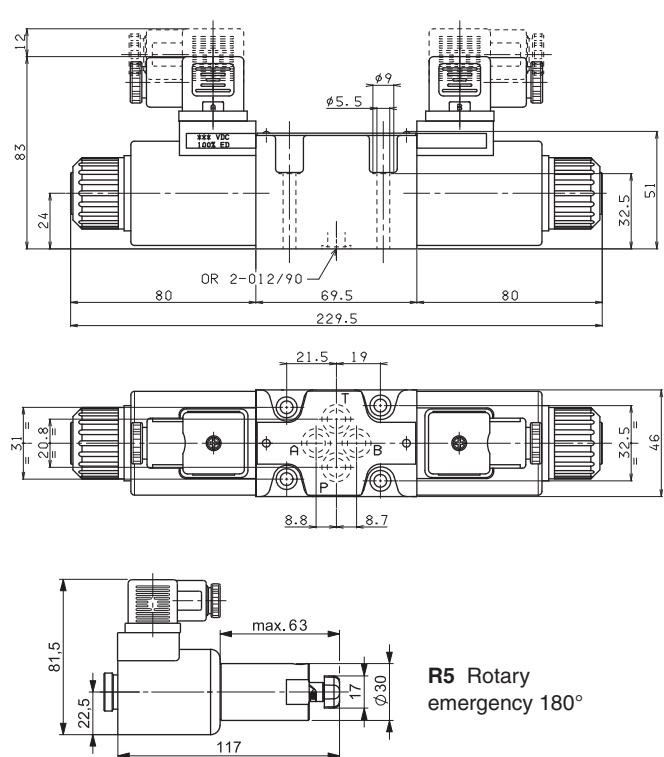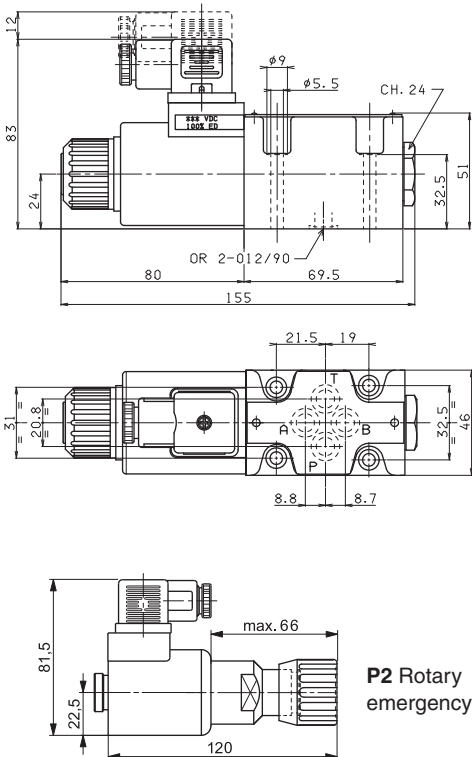

Fixing screws UNI 5931 M5x40 (min. 8.8 material screws are recommended)
Tightening torque $4 \div 5$ Nm / $0.4 \div 0.5$ Kgm



8

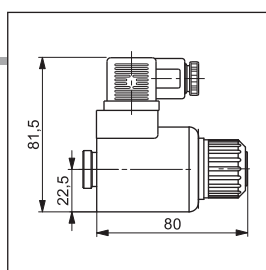

"D15P" PROPORTIONAL SOLENOIDS

Type of protection (in relation to connector used)	IP 66
Duty cycle	100% ED
Insulation class wire	H
Weight (coil)	0,354 Kg
Weight (solenoid)	0,608 Kg

ETD15P - 01/2002/e